


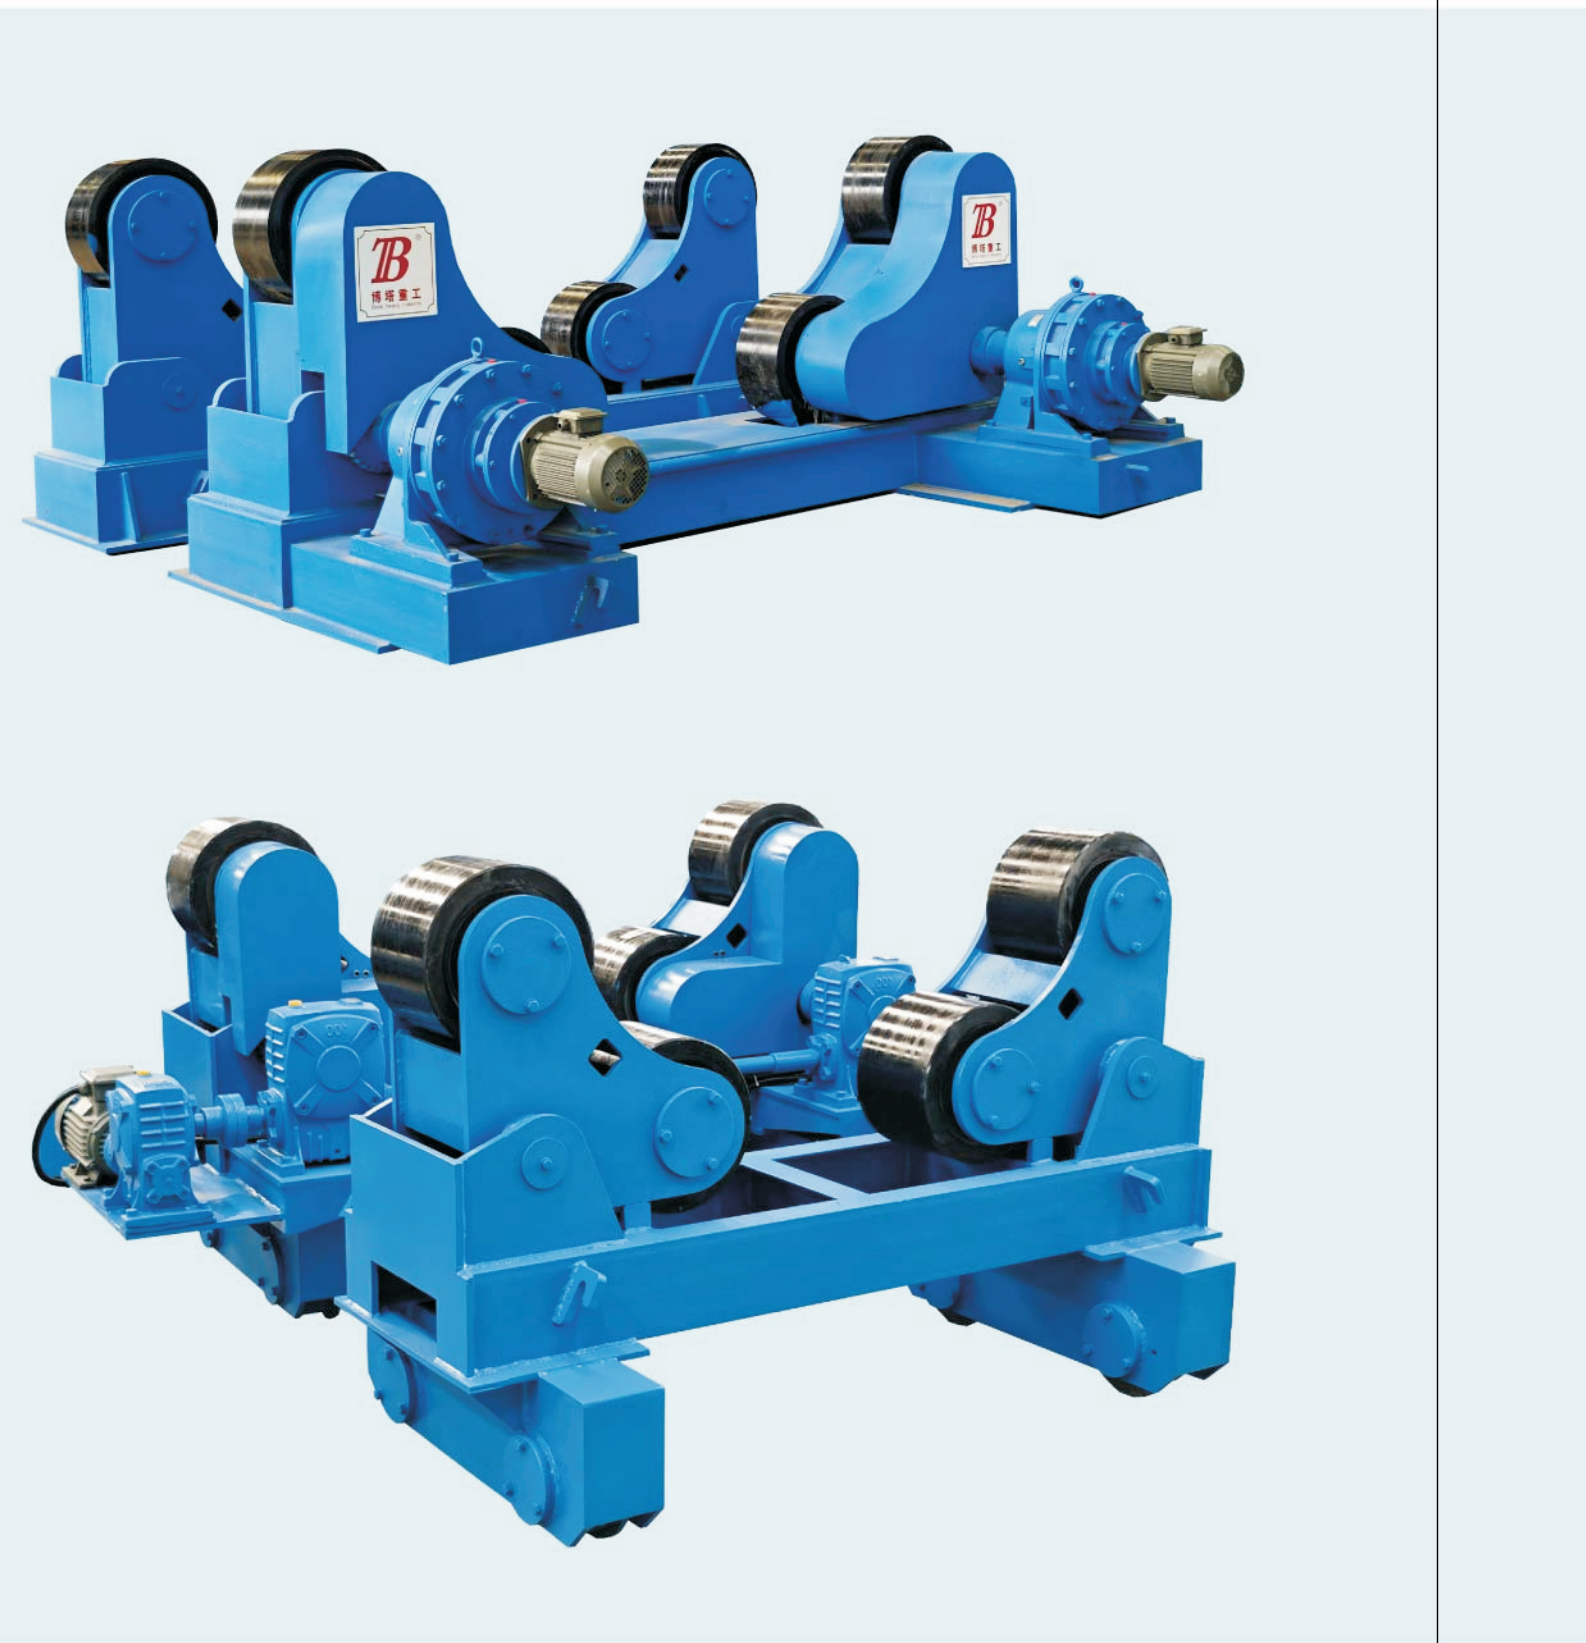

自调式滚轮架系列
BZT SELF-ALIGNMENT WELDING ROTATOR SERIES

- 本系列滚轮架可根据工件直径大小自动调节滚轮组的摆角，无需人工调节。钢胶组合滚轮，驱动能力强，根据驱动方式分为单驱动、双驱动两种形式。
- Self Alignment welding rotators can automatically adjust the swing angle of the roller group according to the diameter of the workpiece without requiring manual adjustment. With Polyurethane covered rollers, they possess strong driving capability and are available in two forms: single-drive and dual-drive, based on the driving method.

技术参数 Technical Parameter

型号 Model	载重 (T) Load (T)	滚轮直径 (毫米) Wheel Dia (mm)	滚轮宽度 (毫米) Wheel Width (mm)	焊件直径毫米 (毫米) Workpiece Diameter (mm)
BZT-5	5	250	120	300-2500
BZT-10	10	300	170	400-3200
BZT-20	20	300	200	600-3800
BZT-30	30	300	200	650-4000
BZT-40	40	350	220	700-4500
BZT-50	50	350	220	700-5000
BZT-60	60	425	220	800-5300
BZT-80	80	425	220	1000-5500
BZT-100	100	425	240	1200-6300
BZT-120	120	425	240	1500-6600
BZT-150	150	550	260	1600-7500
BZT-200	200	550	300	1700-8000
BZT-300	300	550	400	2000-8500
BZT-400	400	600	500	2200-9000
BZT-500	500	650	600	2500-9500

BZT600-3000T以及特种滚轮架请及时联系我们获取参数

Please contact us promptly for specifications regarding BZT-600 to 3000T and special Rotator

以上是标准配置参数，可根据客户具体要求为其定制满足焊接需求的设备。

The above are standard configuration parameters. We can customize equipment to meet specific welding requirements upon the customer's request



可调式滚轮架系列 BKT CONVENTIONAL WELDING ROTATOR SERIES

- 本系列采用预留螺孔或丝杠调节滚轮组中心距，适应工件直径变化。钢胶组合滚轮，承载能力大，驱动能力强。进口变频器无级调速，调速范围宽，精度高启动力矩大。
- This series utilizes pre-designed bolt holes or lead screw adjustments to regulate the center distance of the roller group, accommodating variations in the diameter of the workpiece. The polyurethane covered rollers boast high load-bearing capacity and strong driving capability. An imported variable frequency drive inverter enables seamless speed adjustment, offering a wide range of speed control with high precision and substantial starting torque.



技术参数 Technical Parameter

型号 Model	载重 (T) Load (T)	滚轮直径 (毫米) Wheel Dia (mm)	滚轮宽度 (毫米) Wheel Width (mm)	焊件直径毫米 (毫米) Workpiece Diameter (mm)
BKT-1 (丝杠) (Lead Screw)	1	200	50	150-1500
BKT-3 (丝杠) (Lead Screw)	3	200	100	200-2000
BKT-5 (丝杠) (Lead Screw)	5	250	120	200-2500
BKT-10	10	300	120	300-3000
BKT-20	20	300	200	300-3500
BKT-30	30	350	220	300-4000
BKT-40	40	425	220	300-4500
BKT-50	50	425	220	300-4500
BKT-60	60	450	220	600-5000
BKT-80	80	500	300	800-5500
BKT-100	100	500	400	1000-6000
BKT-120	120	500	400	1000-6500
BKT-150	150	550	500	1100-7000
BKT-200	200	600	500	1200-8000

BKT300-3000T及特种滚轮架请及时联系我们获取参数
Please contact us promptly for specifications regarding BKT-600 to 3000T and special

以上是标准配置参数，可根据客户具体要求为其定制满足焊接需求的设备。
The above are standard configuration parameters. We can customize equipment to meet specific welding requirements upon the customer's request.



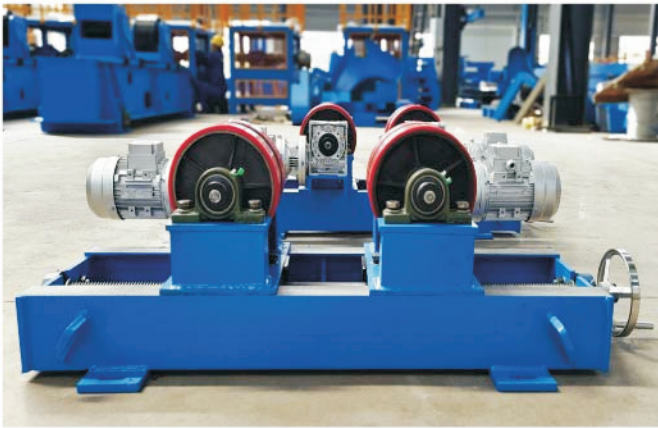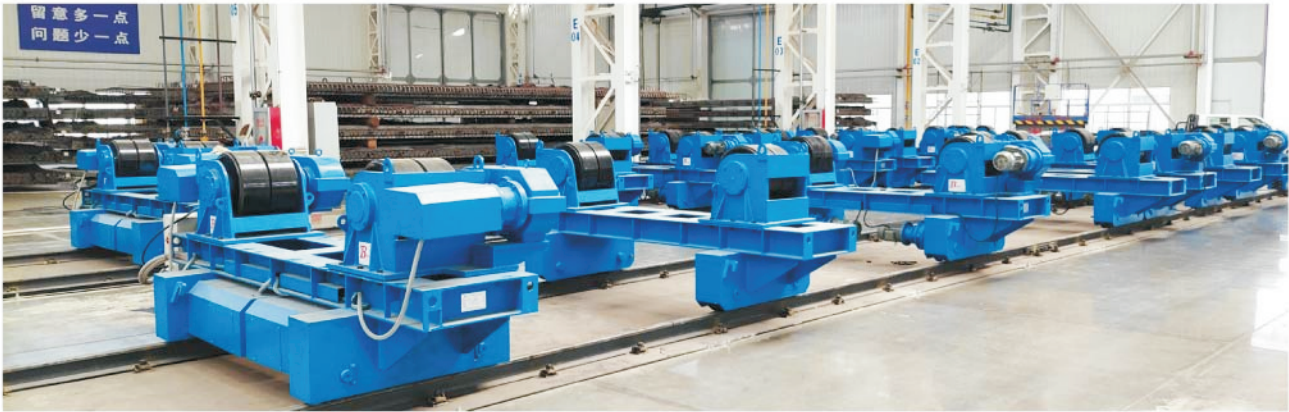

BKTY液压组对滚轮架系列
BKTY HYDRAULIC FIT-UP WELDING ROTATOR SERIES



